


YourHome Solar Wall Light
YOURHOME SOLAR WALL LIGHT
0054041



Product features

- Sleek and modern design solar outdoor wall light in black finishIntegrated PIR sensor and daylight sensorsAutomatic light management - light up automatically when it gets dark after detecting any motionEasy installation - no direct mains wiring or connection requiredHigh lumen output - 290lmLong rated lifetime - 20,000 hoursON/OFF switchRobust construction - ABS housingPerfect for porch, garage, sheds, outhouses, outdoor office, garden fence, gate lightingColour temperature - Cool White 4000KFixing kit includedOperating temperature: -10°C to 40°C

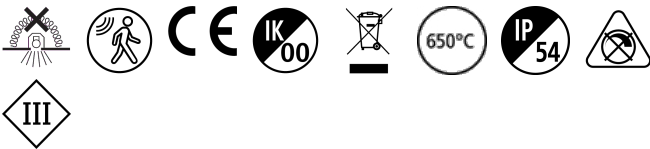

PRODUCT OVERVIEW

Product name	YOURHOME SOLAR WALL LIGHT
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Wall surface mounted
General application	Residential & Consumer
ETIM Class	N/A
Warranty	3 years
Fixture luminous flux (lm)	290
Luminaire efficacy (lm/W)	64
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Photobiological Risk Group	RG1
Electrical protection	Class III
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	Black
IP rating	IP54
IK rating	IK00
Product EAN number	5410288540412

DATA TABLE

General data

Product name	YOURHOME SOLAR WALL LIGHT
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Wall surface mounted

YourHome Solar Wall Light
YOURHOME SOLAR WALL LIGHT
0054041

General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	N/A
Warranty	3 years

Optical data

Fixture luminous flux (lm)	290
Luminaire efficacy (lm/W)	64
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Distribution type	Symmetric
Photobiological Risk Group	RG1

DataTableGroup_Electrical

Primary Supply/Product voltage - min (V)	5
Primary Supply/Product voltage - max (V)	5
Electrical protection	Class III
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	1300
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	N/A

Lifetime data

Lifespan L70 B50	20000
------------------	-------

Physical data

Housing colour	Black
IP rating	IP54
IK rating	IK00
Diffuser finish	Transparent
Diffuser material	Other
Nominal Product Length (mm)	220
Nominal Product Width (mm)	127
Nominal Product Height (mm)	90
Weight (kg)	0.452

Packaging

Product EAN number	5410288540412
Packaging single length / height (cm)	22.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	13.5

YourHome Solar Wall Light
YOURHOME SOLAR WALL LIGHT
0054041

DUN14 (inner)	15410288540419
Units per outer package	6
Packaging outer length / height (cm)	62.7
Packaging outer width (cm)	24.7
Packaging outer depth (cm)	29.4

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

TECHNICAL DRAWINGS

