

Technical datasheet

DUNNA



UNE 60598-2-22

230V 50Hz


IP 42 IK 04



Reference	Lumens	Duration	Lamp	Battery	Power	Operation mode
D-60L	60	1	LED 0,25W	Ni-Cd 3,6V/300mAh	0,4	Non Maintained

Emergency Lighting. DUNNA. D-60L Made by Normalux. Lumens 60 lm. Duration 1 h. Type of operation Non Maintained. Type of installation Surface Mounting. Source of light Led. Battery Ni-Cd 3,6V/300mAh. IP 42. IK 04. Version Standard. Finish White. Cover Transparent. Housing made of Self-Extinguishing ABS+PC. Power 230V 50Hz. Dimensions 322 x 120 x 52. Manufactured as per regulation UNE 60598-2-22.

Isolux Curve

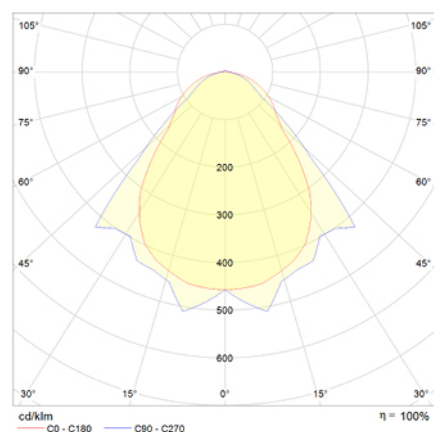

Measurements

