

Technical datasheet

STYLO



UNE 60598-2-22

230V 50/60Hz


IP 42 IK 04



Reference	Lumens	Duration	Lamp	Battery	Power	Operation mode
S-60L	60	1	LED 0,25W	Ni-Cd 3.6V/300mAh	1,9	Non Maintained

Emergency Lighting. STYLO. S-60L Made by Normalux. Lumens 60 lm. Duration 1 h. Type of operation Non Maintained. Type of installation Surface Mounting. Source of light Led. Battery Ni-Cd 3.6V/300mAh. IP 42. IK 04. Version Standard. Finish White. Cover Transparent. Housing made of Self-Extinguishing ABS+PC. Power 230V 50/60Hz. Dimensions 252 x 100 x 40. Manufactured as per regulation UNE 60598-2-22.

Isolux Curve

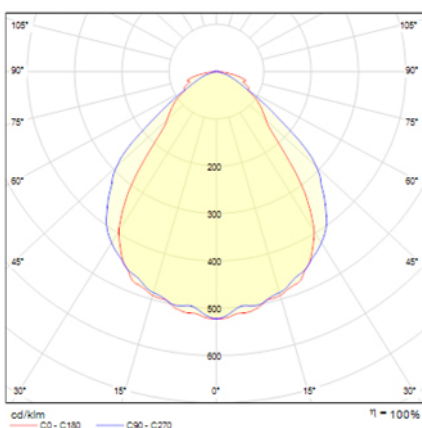

Measurements

